

800 kg

## BW 2400S 8/E-L

Mobile roller cab with 8 drawers, with assortment of 398 tools

- 8 drawers (588x367 mm), with ball bearing slides: 7 drawers, 70 mm high 1 drawer, 210 mm high.
- Drawer bases protected by foamed rubber mats.
- Four castors Ø 125 mm: 2 fixed and 2 steering (one with brake).
- Front centralized safety lock.
- Static load capacity: 800 kg.
- Thermoplastic worktop
- Built-in side bottle holder.



024006241






024006242



024006243



n°	h	↓ max
7	70 mm	25 kg
1	210 mm	30 kg

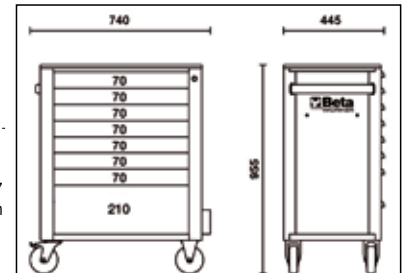

31

BW 42 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm  
 BW 96BPC/SC9 1,5-2-2,5-3-4-5-6-8-10 mm



25

1201E 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm  
 1201EN 4x30 mm  
 1202E PH0x60-PH1x80-PH2x100-PH3x150 mm  
 1202EN PH1x30 mm  
 1207E/TX T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45  
 BW 1253 0,5x100 mm

196



- 1/4"** BW 900 ○ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm  
 BW 900L ○ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm  
 BW 900FTX ⊗ E4-E5-E6-E7-E8-E10  
 BW 900ME ○ 3-4-5-6-7-8 mm  
 BW 900TX ⊗ T6-T7-T8-T9-T10-T15-T20-T25  
 BW 900LP ● 0,8x4-1x5,5-1,2x6,5-1,2x8 mm  
 BW 900PH ⊕ PH0-PH1-PH2-PH3  
 BW 895/1 ○ 1/4" - □ 1/4"  
 BW 900/20 50 mm  
 BW 900/20L 100 mm  
 BW 900/25 150 mm  
 BW 900/30 115 mm  
 BW 900/42 150 mm  
 BW 900/55 ⊗ 150 mm

- 3/8"** BW 910A ○ 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-24 mm  
 BW 910AL ○ 8-10-11-12-13-14-17-19 mm  
 BW 910FTX ⊗ E6-E7-E8-E10-E11-E12-14  
 BW 910PE ○ 4-5-6-7-8-9-10 mm  
 BW 910TX ⊗ T15-T20-T25-T27-T30-40-T45  
 BW 910/21 125 mm  
 BW 910/22 150 mm  
 BW 910/25 ⊗ 205 mm  
 BW 910/55 ⊗ 205 mm  
 BW 920/15F □ 1/2" - ■ 3/8"

**BW 861/C61**

	BW 861LP	0,5x3 (2)-0,5x4(2)-0,6x4,5(2)-0,8x5(2)-1,0x5,5(2)-1,0x6(2)-1,6x8(2) mm
	BW 861PH	PH0(2)-PH1(7)-PH2(7)-PH3(2)
	BW 861PZ	PZ0(2)-PZ1(3)-PZ2(3)-PZ3(2)
	BW 861PE	1,5-2-2,5-3-4-4,5-5-5,5-6-8 mm
	BW 861TX	T9-T10-T15-T20-T25 T27-T30-T40
	BW 882M1	○ 1/4 - ● 1/4

**BW 1256/C21-1**

	BW 1256LP	1,5-2-2,5 mm
	BW 1256PH	PH0-PH1
	BW 1256PZ	PZ0-PZ1
	BW 1256PE	0,7-0,9-1,3-1,5-2-2,5-3 mm
	BW 1256TX	T4-T5-T6-T7
	BW 1256RTX	T8-T10-T15
		4 mm



78



- 1/2"** BW 920A ○ 8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm  
 BW 920AL ○ 10-12-13-14-15-16-17-18-19-21-22-24-27-30-32 mm  
 BW 920FTX ⊗ E10-E12-E14-E16-E18-E20-E22-E24  
 BW 920PE ○ 5-6-7-8-9-10-12-14 mm  
 BW 920PE-L ○ 5-6-7-8-9-10-12-14 mm  
 BW 920TX ⊗ T27-T30-T40-T45-T50-T55-T60  
 BW 920TX-L ⊗ T30-T40-T45-T50-T55-T60-T70  
 BW 920/21 125 mm  
 BW 920/22 250 mm  
 BW 910/16F □ 3/8" - ■ 1/2"  
 BW 920/25  
 BW 920/55 ⊗ 260 mm

30



- BW 55 ⊗ 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm  
 BW 90 ⊗ 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm  
 BW 97TX/SC8 ⊗ T9-T10-T15-T20-T25-T27-T30-T40

73



- 1032 ○ 19+60 mm  
 1034 ○ 19+60 mm  
 1036 ● 19+60 mm  
 1038 ● 19+60 mm  
 BW 1048 250 mm  
 BW 1052 190 - 240 mm  
 BW 1098 220 mm  
 BW 1082BM ≡ 160 mm  
 BW 1150BM ≡ 180 mm  
 BW 1166BM ● 200 mm  
 BW 1168BM ● 200 mm  
 BW 1128BMX 150 mm

25



- BW 30 Ø 2-3-4 mm  
 BW 31 Ø 2-3-4-5-6-8 mm  
 BW 32 Ø 4 mm  
 BW 34 125-150-175 mm  
 BW 36 150 mm  
 BW 1370 500 g  
 BW 1390 Ø 35 mm  
 BW 1692/3 3 m  
 BW 1712T 150+590 mm  
 BW 1719BMA8/Q ■ 200 mm  
 BW 1719BMA8/T ▲ 200 mm  
 BW 1719BMA8/P I 200 mm  
 BW 1719BMA8/M ● 200 mm  
 BW 1719BMA8/R ● 200 mm  
 BW 1737NX 270 mm  
 1771 18 mm